

- Provides DBx configuration access from any portable device
- Connection over secure Wi-Fi
- Built in rechargeable Li-ion battery
- Lightweight and robust design
- Water resistant
- Deploy configurations quickly and easily using templates and backups
- Can be charged from any USB A port
- USB cable and lanyard included



Overview

Technetix' t-box is an operational addition to the DBx access platform range. It's a lightweight, small, rugged and rechargeable Wi-Fi enabled configuration unit. It is compatible with any type of smartphone, tablet or laptop and users can connect and configure any DBx node and amplifier through a touch optimised web application.

The t-box connects to any DBx control module via a USB connection. Users can connect to the device using Wi-Fi as the initial service set identifier (SSID) and login information is shown on the product information label. In order to secure the t-box, the administrator can change the security settings and user login credentials.

Configuration wizard, templating and backup features ensure that you can always deploy modifications and new configurations to amplifiers and nodes within minutes of opening the cabinet. Even when strand mounted, the Wi-Fi range of the t-box allows you to configure the DBx from the comfort of your vehicle.


The t-box is fully upgradeable with the latest software through its intuitive web interface; supporting new features, products and modules within the DBx range.

Benefits

- Ergonomic, easy-to-use
- Designed for outdoor use
- Built-in rechargeable battery gives you up to eight hours of use
- Operated using any smartphone, tablet or laptop
- Deploy configurations quickly and easily with backups and templates
- Compliant with the entire DBx series of amplifiers, nodes and Remote PHY devices
- Up to 10 metres of Wi-Fi range for configuring strand mounted equipment

Specifications

Interface	1 Micro USB for charging 1 Micro USB for DBx connectivity
Input power	5 V DC, 1 Amp
Battery	3.7 V Li-ion 2600 mAh Max 8 hours, will vary subject to device usage
IP Rating	IP54
Wi-Fi	802.11 b/g/n Operating range up to 10 metres outdoors
Dimensions (L x W x D)	107mm x 83mm x 33mm
Operating temperature	0°C to +45°C
*Storage temperature	-25°C to +60°C
Material	Device body - ABS Outer casing - silicone rubber
Accessories included	USB cable, USB A to USB mini adapter, lanyard

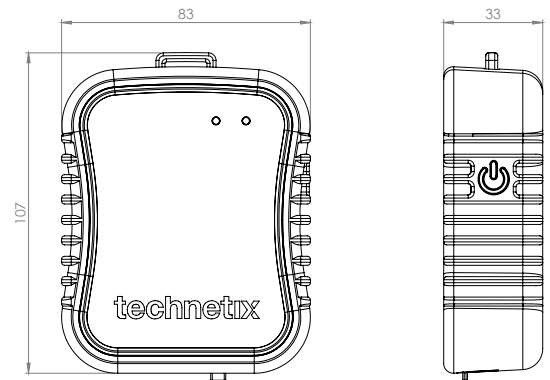

Notes

Device is not designed to be submerged in water
Product is CE, FCC, WEEE and RoHS compliant
* For optimum charging, keep out of sunlight during recharging process

Ordering information

Item Name	Article Number
t-box v1	19011805
Minimum order quantity	25
Individual cardboard box	13cm x 12.5cm x 3.5cm
Master box (25 in each)	57.5cm x 18cm x 20cm

User interface

